




Timenet for Access Control (door entry)

Timenet a "UK" manufactured product, flexible can control doors even gates and turnstiles.

Intelligent units permit various reading devices to be attached and may be used with or with out the terminals own keypad (T012), when the key-pad is not required the terminal is hidden (T009).

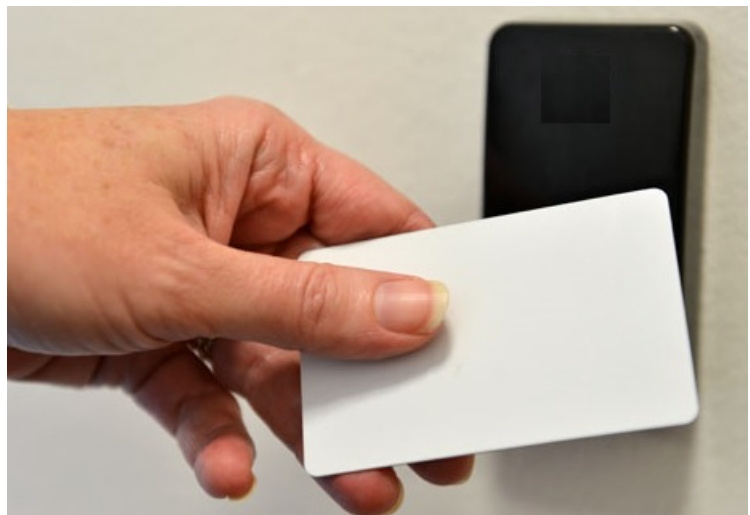

When integrated into the full "Timenet Time & Attendance system" it can enhance the door control and enable the free movement of employees and visitors throughout your business and add security levels at different doors to ensure unauthorised personnel are restricted. Full reporting for valid and restricted entry over any period, full historic access reporting.

Specification

Terminals:	Ethernet or RS485 low voltage terminals power requirements 9-12 VDC 200 mA
Dimensions:	T012: 150mm (W) x 110mm (H) x 40mm (D) - T009: hidden terminal 67mm (W) x 30mm (H) x 22mm (D)
Weight:	T012: 300g – T009: 100g
Cabling:	T012: All cable entry to terminals is from behind or below units
Data Cable:	T012: Ethernet or RS485 (2 pair twin twisted screened or cat5 screened) – T009 RS485 only
Door Release:	Magnetic locks or Mortice electric door release fail secure
Environment:	Temperature 0°-40°C Humidity: 15%-90% Non-Condensing (Optional IP56 sealing)